

2004 Manufacture

Sizes of Hose Fitting are based on an internal interference friction fit in to clear PVC hose i.e. 25mm barbs are actually 26mm and 32mm barbs are 33mm dia. This is the standard rule. Max temp, 40 C or 1 Bar at ambient temp. Chemical resistance to always be considered before any application. Information subject to change without notification




HOSE TAP 2 WAY & 3 WAY

Black PP and PPO

2 Way Version


Side view with lever

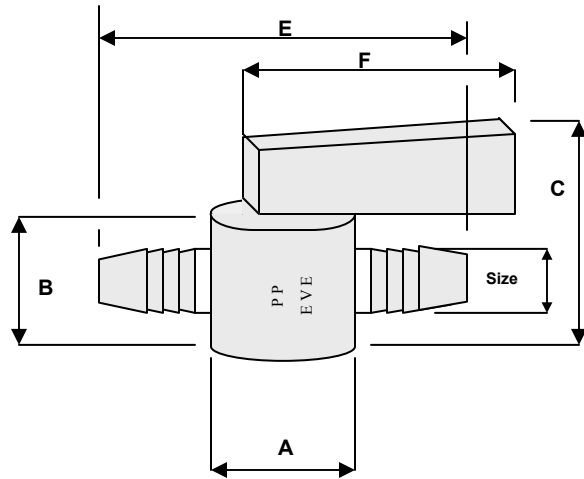

Hose Tap 2 Way							
Hose Size	A	B	C	E	F	W gms	Bore Dia
6mm	22	25	38	70	40	8	4x4
10mm	22	25	40	68	40	8	8x8
13mm	25	33	50	77	52	16	10x10
20mm	36	45	64	94	64	40	15x15
25mm	50	51	86	117	88	74	18x18
33mm	51	57	110	122	105	88	26x26

3 Way Version

Top plan view without lever

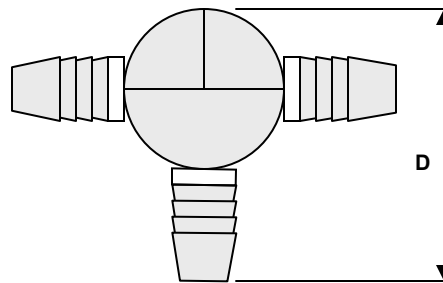

Hose Tap 3 Way								
Hose Size	A	B	C	D	E	F	W gms	Bore Dia
6mm	22	25	38	46	70	40	8	4x4x4
10mm	22	25	40	45	68	40	10	8x8x8
13mm	25	33	50	52	77	52	16	10x10x10
20mm	36	45	64	65	94	64	40	15x15x15
25mm	50	51	86	83	117	88	74	18x18x18

Everyvalve Ltd.
 19, Station Close
 Potters Bar
 Herts. EN6 1TL
 U.K

www.everyvalve.com
Sales@everyvalve.com

Tel:01707-642018
 Fax:01707-646340